


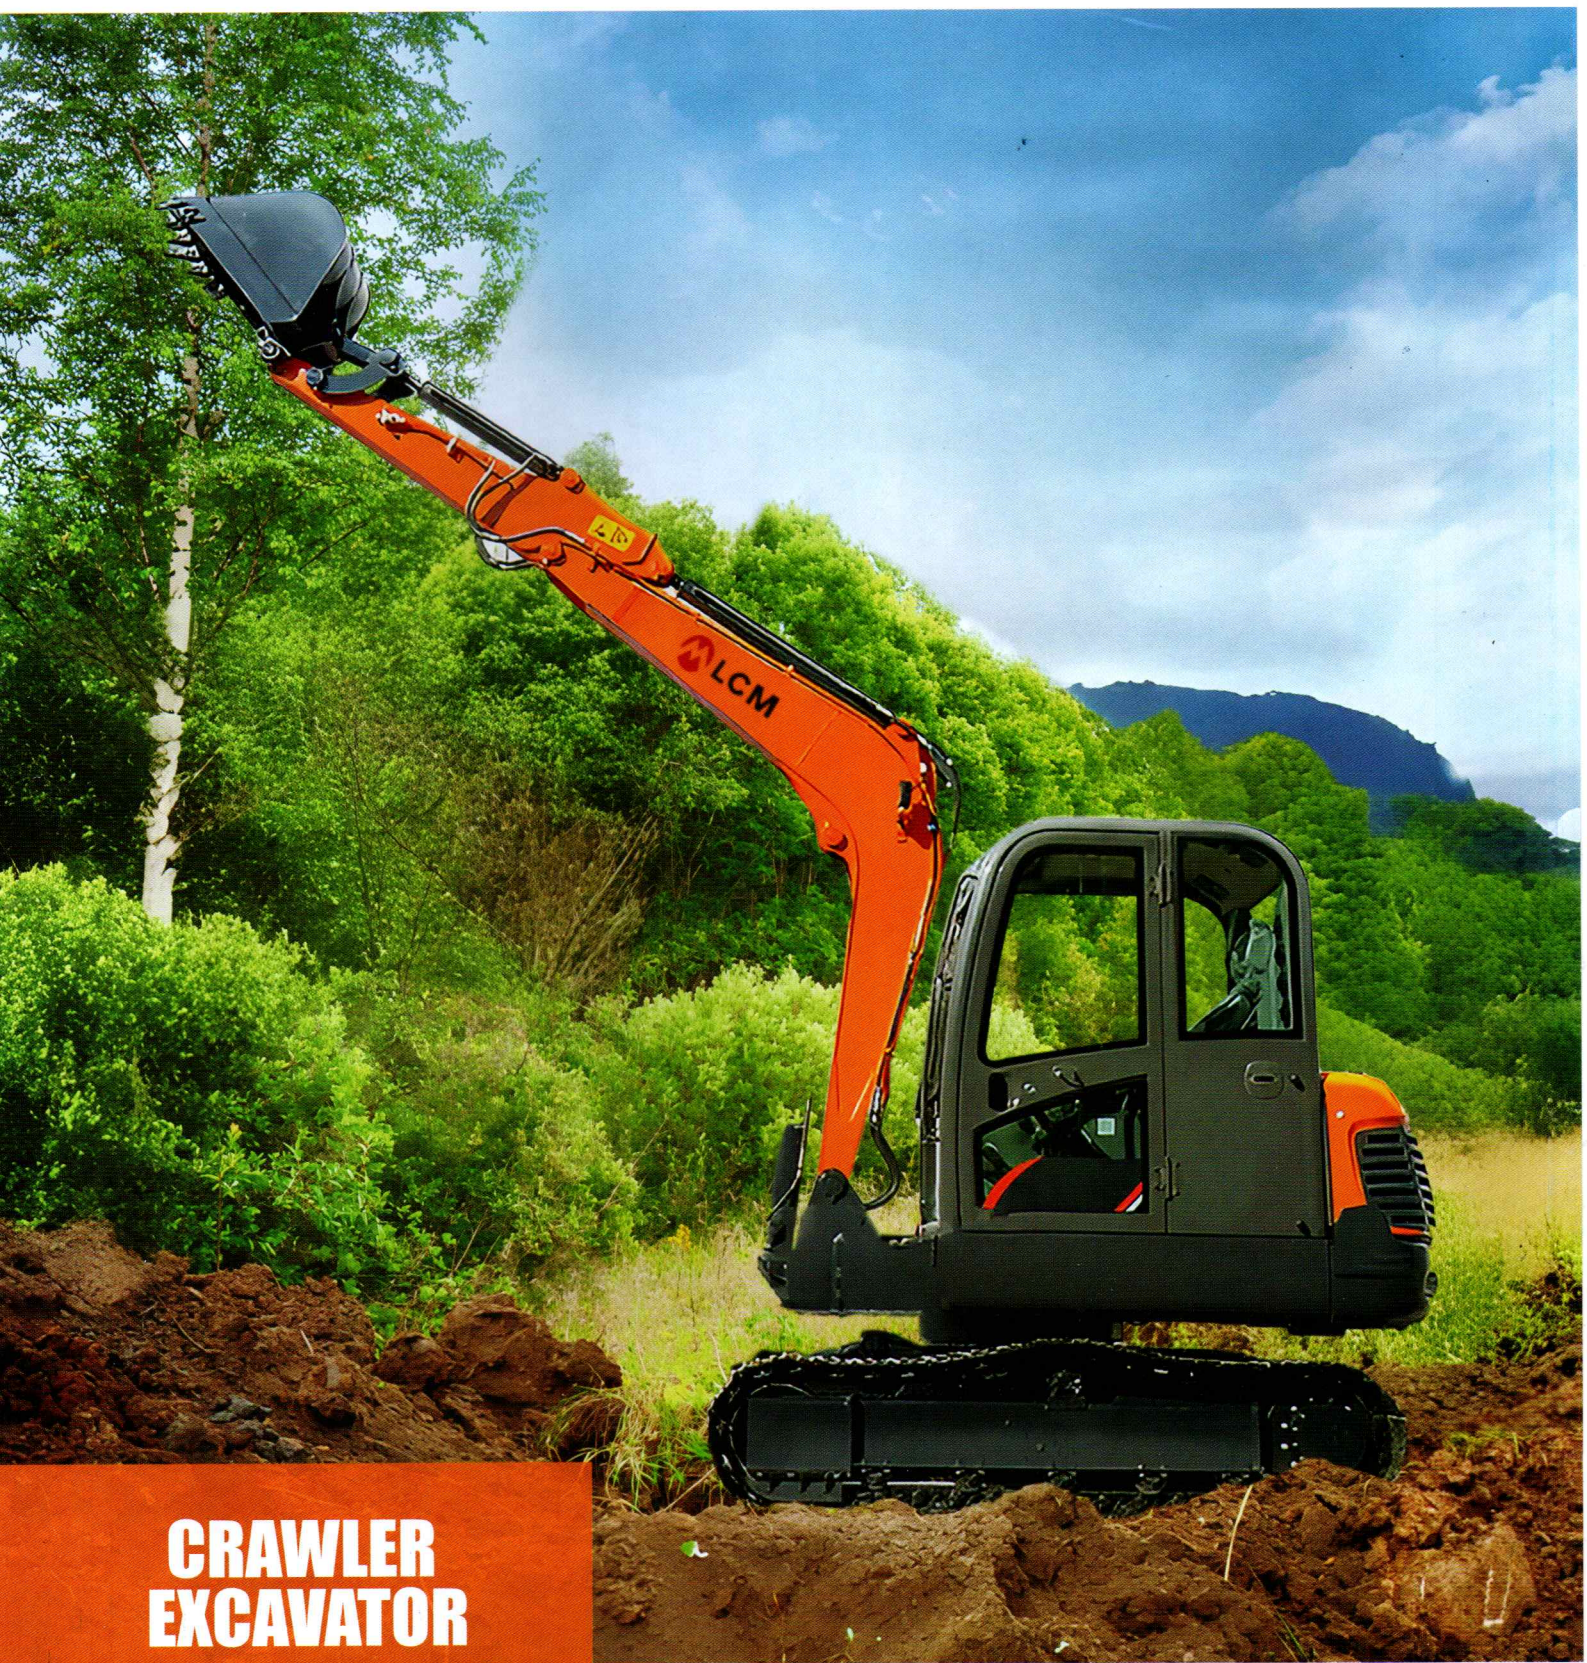

CRAWLER EXCAVATOR EX 60

- 工作重量 Working weight: 6T
- 额定功率 Rated power: 38.1KW
- 挖斗容积 Bucket capacity: 0.23m³

Engine : Yanmar 4TNV94L

主要性能 Main performance

行驶速度 (高 / 低) Travel speed (H/L)	4.1/2.5	km/h
摆动速度 Swing speed	9.5	r/min
爬坡能力 Gradeability	35	°
接地压力 Ground pressure	32.5	kPa
铲斗挖掘力 Bucket digging force	37.7	kN
小臂挖掘力 Arm digging force	28.4	kN
最大牵引力 Maximum tractive force	50.5	kN

液压系统 Hydraulic system

主泵 Main pump	/	/
主泵额定流量 Rated flow of main pump	55X2	L/min
主安全阀压力 Main safety valve pressure	21	MPa
行走系统压力 Travel system pressure	21	MPa
回转系统压力 Swing system pressure	22	MPa
先导系统压力 Pilot system pressure	3.5	MPa

油容量 Oil Capacity

油箱容量 Fuel tank capacity	115	L
液压油箱容量 Hydraulic tank capacity	85	L
机油容量 Engine oil capacity	12	L

外观尺寸 Apperance size

动臂长度 Length of boom	3000	mm
臂长 Length of arm	1600	mm
斗容量 Bucket capacity	0.2	m ³
A 全长 Overall length	21	mm
B 总宽 Overall width	5850	mm
C 总高度 Overall height	2575	mm
D 平台宽度 Width of platform	1885	mm
E 底盘总宽 Overall width of chassis	1880	mm
F 履带板宽度 Track shoe width	400	mm
G 轮距 Wheel gauge	1990	mm
H 轨距 Track gauge	1480	mm
I 配重间隙 Counterweight clearance	700	mm
J 最小离地间隙 Minimum ground clearance	350	mm
推土铲 (宽度 / 高度) Dozer blade (width / height)	1920X340	mm

工作范围 Working Range

A 最大挖掘高度 Max. digging height	5760	mm
B 最大卸载高度 Max. dumping height	4030	mm
C 最大挖掘深度 Max. digging depth	3820	mm
D 2240 毫米 (8 英尺) 水平底部的最大切割深度 Maximum depth cut for 2240mm(8 ft) level bottom	2680	mm
E 最大垂直壁挖掘深度 Maximum vertical wall digging depth	6130	mm
F 最大挖掘半径 Max. digging radius	6150	mm
G 最小回转半径 Min. swing radius	1650	mm
推土铲最大提升高度 Dozer blade maximum lifting height	390	mm
推土铲最大挖掘深度 Dozer blade maximum digging depth	560	mm

可选设备 Optional Equipment

液压管路: 破碎锤 Hydraulic pipeline: breaking hammer	°	液压油 ISO VG 32、68 Hydraulic oil ISO VG 32, 68	°
灭火器 Fire extinguisher	°	翻车保护结构 (ROPS) Roll over protection structure (ROPS)	°
落物保护结构 (FOPS) Falling object protection structure (FOPS)	°	履带橡胶块 Track rubber block	°
破碎锤 Breaking hammer	°	铲斗 0.08m ³ (ISO 满斗) Bucket 0.08m ³ (ISO full bucket)	°
铲斗 0.21m ³ (ISO 满铲斗) Bucket 0.21m ³ (ISO full bucket)	°	铲斗 0.25m ³ (ISO 满铲斗) Bucket 0.25m ³ (ISO full bucket)	°
铲斗 0.30m ³ (ISO 满斗) Bucket 0.30m ³ (ISO full bucket)	°	12V 点火器 12V cigarette lighter	°

起重能力 Lifting Capacity

Lifting point height (m)	Rated lift capacity -Straight ahead (back) (kg)				Rated lift capacity -over-side (kg)			
	Lifting point radius (m)			Lifting capacity at maximum radius	Lifting point radius (m)			Lifting capacity at maximum radius
	1.5	3			1.5	1.5	1.5	
4.5				*990				870
3			870	750			630	530
1.5		1640	830	630		1160	580	430
		1500	780	640		1030	540	440
-1.5	*2370	1480		810	*2370	1010		560

BRAND **NEW** UPGRADE **NEW** EXPERIENCE

全新升级 全新体验



HOTLINE
YUDI LIFTCO | 0822 3441 7102

PT LIFTCO INDO PERKASA

www.liftcoindoperkasa.co.id

JAKARTA

Phone : +62 21 2967 2215

Email : marketing@liftco.co.id

SURABAYA

Phone : +62 31 7870701

Email : sby@liftco.co.id

SEMARANG

Email : smg@liftco.co.id